


SMART LIGHT | CEILING LIGHTING

2015036101

nordlux®

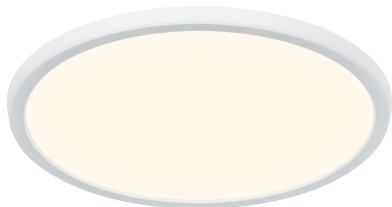

Voltage (V): 230 Volt
IP degree if the fixture includes
two types of IP degree: IP20
Class (Class I, Class II, Class III):
Class 2 (Double isolated)
Lampholder type (eg, E27/E14,
etc): LED Module

Primary material: Plastic

Width (cm): 29.4
Length (cm): 29.4
Projection (cm): 2.3
EAN: 5704924002977
TUN: 2116034
Item Number: 2015036101
Pcs Per Master Carton: 3
Sales Box Height (cm): 30
Sales Box Width (cm): 29.5

Sales Box Depth (cm): 2.8
Sales Box Volume m³: 0.0025
Net weight of the luminaire (kg):
0.6

Useful Lumen (lm): 1600
Color Temperature (K): 2700-
6500
Ra-value : 80
Lifetime (h): 25000
Spread Angle (°) (beam angle of
luminaire): 120
Candela (cd) (for directional
lamp only): 0
Energy Class: F

- Ultra-slim ceiling panel light • Bluetooth connection to Nordlux SmartLight
- Adjustable kelvin and lumen output • Ultra-slim ceiling panel light

Oja is an ultra slim ceiling panel light in a modern and simple design that is very easy to install and can be connected to Nordlux Smart Light using Bluetooth. With your chosen device you will have the ability to change the light from a warm white to a cool white.

Oja is integrated with the newest Bluetooth Mesh technology which allows you to control the light using your phone and that works both indoor and outdoor with a stable communication between your devices.