

## Safety vacuum cleaner with automatic filter cleaning system, 30 l, class M

### VCE 33 M AC-Set

#### **Order number 465.682**



### Safety vacuum cleaner with automatic filter cleaning system, 30 l, class M

- + Adapter plate for fixing L-BOXXes and Tanos systainers on the head of the vacuum cleaner
- + The high-performance turbine ensures both a high suction capacity and a high vacuum. The outcome is an excellent extraction result
- + Continuous automatic flat filter cleaning ensures no loss of suction
- $+ \ The \ flat-fold \ filter \ with \ Teflon \ coating \ / \ nanocoating \ allows \ optimum \ use \ of \ the \ tank \ volume$
- + With permanent socket and electronic automatic on/off switch
- + Flow sensor technology monitors the flow rate and emits a visual and audible signal to indicate any drop below the statutory minimum value of ≤ 20m/s
- + The flow rate control via the rotary switch minimises possible vacuums on the surface during intermediate and finish sanding
- + Suction diameter selector switch for adjusting the optimum flow rate
- + Suitable for wet vacuuming: with electronic liquid level control
- + Soft start stops any voltage peaks at the start and the run-on feature (15 sec. overrun) empties any remaining dust in the vacuum hose
- + Double-walled sturdy container with integrated grip recess for emptying the container easily
- + Dust-protected antistatic finish prevents electric charging of the suction hose
- + Equipped with large wheels and two swivel guide rollers made of metal
- + Separate motor air cooling duct with coarse dirt filter. Protects the turbine against the ingress of ambient air and thereby extends the service life. (Fine dust filter PES available as an accessory)
- + Simple filter change without removing the suction head
- + With hose retainer and expander for easy, quick securing of the power cable
- + With 4 clamping loops (2 on each side ) for attaching straps and a giraffe holder
- + Recommendation: When working with a filter bag turn off the automatic cleaning system. When using a disposable bag leave the system on
- + Class M safety vacuum cleaner, suitable for all dusts with OEL values  $\geq$  0.1 mg/m<sup>3</sup>. Specifically for mineral and timber dusts (also beech and oak)

Technical attributes	
Power input P. max.	1200 watt
Max. volume flow	4500 l/min
Max. vacuum	25000 Pa
Filter surface	5000 cm <sup>2</sup>
Container volume	30 l
Liquid capacity	17 l
Power take off	100-2400 watt
Cable length	7,5 m
Size (W x L x H)	565 x 385 x 565 mm
Weight	15,2 kg

Standard equipment	
Antistatic suction hose Ø 32 mm x 4 m with clip connection including auxiliary air control and suction adapter SAD-C D25-32AS	406.708
1 L-BOXX <sup>®</sup> holder	445.169
1 flat-fold filter PES L/M/H	445.118
1 fleece filter bag class L/M	1 piece of 502.227
1 PP waste disposal bag	1 piece of 445.061
1 adapter Ø 25-32 mm, anti- static	445.029
Hose clip	2 pieces
1 cleaning set	445.053



### **Accessories**

### PES flat folded filter





Technical attributes		
QTY/PKG	1	

Teflon-coated/nano-coated Class M filter, can also be used for L and H vacuum cleaner. Long service life thanks to high-quality PES filter fleece. The dirt-repelling surface improves the cleaning of the filter material. The filter pores are reliably kept free of dirt. Easy to clean, long service life, also suitable for wet work.

### PES flat folded filter

#### **Order number 445.134**



Technical attributes	
QTY/PKG	1

PES motor cooling air prefilter, cleans the cooling air in particle-loaded area in order to protect the motor. For all classes L/M/H of the 33 and 44 series.



### **Accessories**

# Longlife filter sack



Order number 445.517

Technical attributes	
QTY/PKG	1

Resealable, reusable filter bag made of 3-layer polyester fleece for sucking up coarse dirt.

# Disposal bag




Order number 445.061

Technical attributes	
QTY/PKG	5

Sealable waste bag made of PP, ideal for coarse dirt. For VCE 33/44 L/M AC.

### Handle



**Order number 445.150** 

Technical attributes	
QTY/PKG	1

 $Easy \ to \ mount, for \ comfortable \ handling \ of \ the \ vacuum \ cleaners \ even \ when \ the \ container \ is \ full.$ 



### **Accessories**

## L-BOXX® holder

**Order number 445.169** 



Technical attributes

QTY/PKG 1

Adapter plate for securing L-BOXXes and Tanos systainers on the head of vacuum cleaner. For VCE 33/44 L/M/H.

### L-BOXX® Air holder

Order number 445.177



Technical attributes	
QTY/PKG	1

Attachment for using pneumatic devices and for fixing L-BOXXes and Tanos systainers. Regulates the automatic activation when pneumatic devices are used.



### **Accessories**

### **Giraffe holder**



#### **Order number 445.185**

Technical attributes	
QTY/PKG	1

Support for holding the giraffes GE 5/ GE 5 R can be easily clipped on to the head of the vacuum cleaner VCE 33/44 L/M/H AC.

# Antistatic suction hose with auxiliary air control

**Order number 406.708** 



Technical attributes		
QTY/PKG	1	

Internal  $\emptyset$  32 mm, 4 m with universal device connection, snap connection and universal adapter (445.029), antistatic. Includes variable adjustment of suction power for reduction of vacuum.



### **Accessories**

### Antistatic suction hose



#### Order number 379.395

Technical attributes	
Dimensions in mm	27 Ø x 4m
QTY/PKG	1

Internal Ø 27 mm, 4 m with universal device connection and coupling bush Ø 27 mm with rotary coupling for power tool, antistatic.

### **Suction hose extension**



#### Order number 296.953

Technical attributes	
QTY/PKG	1

Suction hose extension with click connection to connect with inside thread adapter i.e. SAD D32-..., SAD D25-32 AS etc.

## Suction hose snap coupling repair kit



#### Order number 408.697

Technical attributes	
QTY/PKG	1

Coupling bush for suction hose with snap coupling, 3-part. Also suited for antistatic suction hose (electrically conductive). Inclusive with auxiliary air.



### **Accessories**

# **Snap-ring grey**




For suction hose SH-C with snap coupling.

#### Order number 379.654

Technical attributes	
QTY/PKG	1

# Clip-on quick clamping ring red



For suction adapter SAD-FC 32 and for GE 5 / R, GSE 5 R.

#### **Order number 406.023**

Technical attributes	
QTY/PKG	1

## Threaded ring clip with auxiliary air control

**Order number 406.716** 



Technical attributes		
QTY/PKG	1	



for suction hose 32 mm.

# **Clip adapter**



Order number 408.360

Technical attributes		
QTY/PKG	1	

For connecting a FLEX power tool to extraction units from other manufacturers. Suitable for hoses inside Ø 27 mm, outside Ø 36 mm, with auxiliary air adjustment.

# Fast clip adapter



### Order number 410.497

Technical attributes		
QTY/PKG	1	

Change adapter on electric power tools with closed FLEX clip-system for quick and easy detachment/attachment (quick clamping ring).



### **Accessories**

# **Adapter**



Order number 445.029

Technical attributes		
QTY/PKG	1	

Universal adapter antistatic, for universal connection of machines with 25-32 mm Ø extraction connection with 32 mm suction hose, for adapter with snap connection, can be trimmed to 3 different diameters.

# **Adapter**



Suitable for suction hoses using the FLEX clip-system. Antistatic design.

#### **Order number 445.142**

Technical attributes		
QTY/PKG	1	



### **Accessories**

# **Adapter**



Order number 382.736

Technical attributes		
QTY/PKG	1	

Antistatic sleeve  $\emptyset$  27 mm, with internal thread, suitable for suction hose 379.395.

# **Adapter**



Order number 259.827

Technical attributes	
QTY/PKG	1

Universal adapter with 32 mm thread inside for universal connection of machines with 25-32 mm Ø extraction connection with 32 mm suction hose (without clip attachment), or with suction hose extension (296.953). Adapter can be trimmed to 3 different diameters.



### **Accessories**

## Special adapter



**Order number 340.790** 

Technical attributes

QTY/PKG 1

Suitable for suction hoses with 32 mm Ø without FLEX clip-system and for the suction hose extension (296.953).

## **Special adapter**



**Order number 364.460** 

Technical attributes		
QTY/PKG	1	

Suitable for vacuum hose with FLEX clip-system. Antistatic equipment. For WSE 500 and WS 702 VEA. Note: to attach the extraction connection to WSE 500, WS 702 VEA please order the following articles, snap ring 359.696, clamping nut 359.688.



### **Accessories**

## **Special adapter**



Order number 328.308

Technical attributes		
QTY/PKG	1	

Adapter 32/32 mm, for connecting a machine with 32 mm Ø vacuum cleaner outlet (e.g. renovation sander or angle grinder with cutting guard) with 32 mm vacuum hose or with suction hose extension (296.953).

# **Special adapter**



**Order number 251.847** 

Technical attributes		
QTY/PKG	1	

Adapter 32/28 mm, for connecting machines with 28 mm Ø vacuum attachment to 32 mm vacuum hose or with suction hose extension (296.953). For MS 1706/1709 FR.



### **Accessories**

# **Coupling bush**



Order number 257.169

Technical attributes	
QTY/PKG	1

For connection of 32 mm  $\emptyset$  suction hoses and suction hose extension SHV-C 32x0.5 m (296.953) to the device with 36 mm  $\emptyset$  extraction connection.

# **Coupling bush**



Order number 296.996

Technical attributes		
QTY/PKG	1	

For connecting two FLEX vacuum hoses, without connection, inside thread 32 mm.

# **Cleaning set**



Order number 445.053

Technical attributes	
QTY/PKG	1

Consisting of an antistatic elbow (445.010) for connecting the suction hose and suction pipe, 3 x 350 mm extension pipe INOX (445.207), clip



floor nozzle (445.509), round brush (385.646), cushion nozzle (385.549) and joint nozzle (385.530).

## Elbow Order number 445.010



Technical attributes

QTY/PKG 1

Antistatic, for connection of suction hose with snap connection and suction tube.

### **Extension tube**



Order number 445.207

Technical attributes		
QTY/PKG	3	

Stainless steel extension pipes, length 3 x 350 mm. For connection to elbow K-C 32 KU AS (445.010).



### **Accessories**

### **Brush nozzle**



Order number 385.557

Technical attributes	
QTY/PKG	1

Brush nozzle with brush edge for cleaning sensitive surfaces. Width 46 mm, length 220 mm.

### **Round brush**



**Order number 385.646** 

Technical attributes	
QTY/PKG	1

Round brush nozzle with brush edge for cleaning sensitive surfaces. Diameter 36 mm, length 120 mm.

# **Upholstery nozzle**



Upholstery nozzle with thread catcher, diameter 36 mm, width 115 mm.

**Order number 385.549** 

Technical attributes	
QTY/PKG	1



### **Accessories**

### **Crevice nozzle**



Crevice nozzle diameter 36 mm, length 300 mm (not serial equipment).

#### Order number 385.530

Technical attributes	
QTY/PKG	1

### Surface nozzle



#### Order number 413.437

Technical attributes	
QTY/PKG	1

The surface nozzle (90x120 mm) made of plastic with bevelled nozzle part is suitable for the suction of dust and loose dirt residues for small repair work for the suction in corners, niches, recesses, window sills that are difficult to reach. Also available as wide crevice tool for the suction of cracks as well as in the interior of vehicles for seat surfaces, gaps and consoles.



### **Accessories**

### **Combination floor nozzle**





QTY/PKG 1

**Technical attributes** 

Switchable combination floor nozzle for cleaning carpeted floors and hard floors. Diameter 36 mm, width 260 mm.

### Floor nozzle with rollers

#### Order number 369.896



Technical attributes		
QTY/PKG	1	

Aluminium floor nozzle with height-adjustable castors and replacement insert. Inserts: brush insert for dry cleaning and rubber strips for wet cleaning, 370 mm width.



### **Accessories**

## **Brush strip**




Brush strip insert (spare part) for aluminium floor nozzle (369.896)

#### **Order number 374.075**

Technical attributes	
QTY/PKG	2

# **Rubber strip**

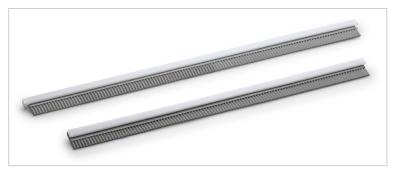

Rubber lip insert (spare part) for aluminium floor nozzle (369.896).

#### **Order number 374.083**

Technical attributes		
QTY/PKG	2	

### Floor nozzle



Order number 445.509

Technical attributes		
QTY/PKG	1	

Brush strip insert for dry cleaning and rubber strip insert for wet cleaning. Diameter 36 mm, width 300 mm.



### **Accessories**

# Clip floor nozzle with rollers



#### **Order number 385.573**

Technical attributes		
QTY/PKG	1	

Clip floor nozzle with rollers and interchangeable insert. Brush strip insert for dry cleaning and rubber strip insert for wet cleaning. Diameter 36 mm, width 400 mm.

# **Brush strip**



Order number 385.581

Technical attributes		
QTY/PKG	2	

Brush strips (replacement requirement) for the clip floor nozzle (385.573).

# **Rubber strip**



Rubber lips (replacement requirement) for clip floor nozzle (385.573).


#### **Order number 385.603**

Technical attributes		
QTY/PKG	2	



### **Accessories**

## **Drill dust adapter**

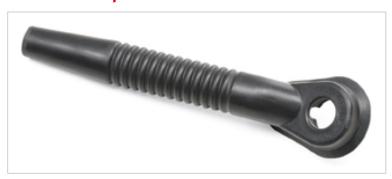

#### **Order number 394.025**

Technical attributes	
Dimensions in mm	290 x 65
QTY/PKG	1

The drill dust extractor is connected to the suction hose of the FLEX vacuum cleaners or to different adapters so that the dust is extracted directly through the drill hole. There is no dust residue. For drilling applications up to Ø 24 mm.

# Cable clip



#### Order number 252.188

Technical attributes		
QTY/PKG	1	

For fixing power tool cable to vacuum hose, suitable for 27-36 mm external  $\emptyset$ .

# **Rotating vacuum adapter**



#### Order number 340.804

Technical attributes	
QTY/PKG	1

The connector rotates and connects the 32 mm diameter suction hose with its intake fitting. Also suitable for the antistatic suction hose



(electrically conductive).

# **Cleaning set**



**Order number 451.703** 

Technical attributes		
QTY/PKG	1	

Consisting of 1 carrying case L-BOXX<sup>®</sup> 102, antistatic elbow (445.010) for connecting the suction hose and suction pipe, 3 x 350 mm extension pipe INOX (445.207), clip floor nozzle (445.509), round brush (385.646), cushion nozzle (385.549) and joint nozzle (385.530).

### **Exhaust air set**



#### **Order number 477.621**

Technical attributes		
QTY/PKG	1	

Consists of suction hose inner Ø 50 mm, 4 m and VCE exhaust air connector and coded suction hose connection. To remove the cleaned exhaust air from the work area. This prevents hazardous dust from being whirled around and polluting the working environment with more fine respirable dust.



#### **Accessories**

## **Cleaning set**



**Order number 477.613** 

Technical attributes		
QTY/PKG	1	

Comprises suction hose inner-Ø 50 mm, 1,75 m, 2 plastic suction tubes Ø 50 x 510 mm, and 1 coarse dust nozzle Ø 50. To vacuum heavy, coarse dust. By using this D50 cleaning set, the maximum air volume of the suction equipment is used to vacuum heavy dust and particles effectively. The special coarse dust nozzle supports this effect and is designed to take up dirt specifically without a loss in air volume.

## Antistatic suction hose with auxiliary air control

#### **Order number 477.605**



Technical attributes	
QTY/PKG	1

Inner-Ø 32 mm, 4 m with clip system grey including bleed air control, antistatic. The suction hose is sheathed in polyester fabric so it slides more easily across edges and uneven surfaces which prevents from abrasion damage. The polyester fabric increases the flexibility of the hose and protects it against solar radiation.



### **Accessories**

## Fleece filter bags



Order number 502.227

Technical attributes		
QTY/PKG	5	

Class M fleece filter sack. Improved filling compared with paper filter sacks, durable and moisture-resistant. Due to the larger dimensions, the filter sack can be used for both containers 33 and 44.

# Suction hose with auxiliary air control



#### Order number 445.037

Technical attributes		
QTY/PKG	1	

Internal Ø 32 mm, 4 m with universal device connection, snap connection, includes variable adjustment of suction power for reduction of vacuum.



### **Accessories**

### **Suction hose**



**Order number 341.355** 

Technical attributes		
QTY/PKG	1	

Internal Ø 32 mm, 4 m with universal device connection. With special adapter SAD D32 WS/WSK.

# **CordlessConnect system**



#### Order number 512.869

Technical attributes	
QTY/PKG	1

For connecting cordless units to professional corded safety vacuum cleaners. The radio remote control is fixed to the suction hose or battery unit by means of a grid tape, the radio socket is connected to the mains cable and the vacuum cleaner is set to manual operation. The vacuum is activated via the wireless remote control at the touch of a button or automatically via the built-in vibration sensor. Set consisting of radio socket, radio remote control, long and short grid tape (23.5 /13 cm).