

## 1300 watt angle grinder with brushless motor, 125 mm

**L 13-10 125-EC**

Order number 495.255



### 1300 watt angle grinder with brushless motor, 125 mm

- + Brushless motor with greater efficiency and a longer service life
- + Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection, CDC-electronic feedback control
- + Anti-Kickback - this shuts down the motor on the disc being blocked
- + Perfect dust protection thanks to removable protective metal grille
- + Extremely streamlined handle section for perfect handling
- + More ergonomic handling due to inclined side handle
- + Extremely light and handy
- + Tool-free adjustment of safety guard
- + Spindle lock
- + This universal angle grinder is suited for steel/metal surface finishing, for work on the site/renovation as well as for vehicle bodywork and construction firms
- + Side handgrip

#### Technical attributes

Max. disc diameter	125 mm
No load speed	10000 rpm
Power input	1300 watt
Power output	910 watt
Tool fixture	M 14
Cable length	4,0 m
Size (W x L x H)	295 x 75 x 110 mm
Weight	2,0 kg

#### Standard equipment

1 guard grinding 125 Ø	436.860
1 handle	437.921
1 clamping flange	335.282
1 clamping nut M14	100.080
1 pin wrench	100.110

## Accessories

### Cutting guard

Order number 437.069



#### Technical attributes

Diameter in mm	125
QTY/PKG	1

Cutting guard, suitable for L / LE 9-11 125, L 12-11 125, L 13-10 125-EC, LB/LBE 17-11 125, L/LE 15-11 125, LB/LBE 125 18.0-EC.

### Disc guard cover

Order number 446.041



#### Technical attributes

Diameter in mm	125
QTY/PKG	1

For tool-free conversion of the existing guard for cutting work.

### Extraction hood

Order number 445.479



#### Technical attributes

Diameter in mm	125
QTY/PKG	1

Extraction hood kit for working with cutting discs for 125 mm angle grinders. Consisting of extractor and aluminium cover. Can be fitted to the

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

existing guard without using any tools.

## Diamantjet - diamond cutting disc, standard, concrete

Order number 349.046



Technical attributes	
Dimensions in mm	125 Ø x 22,2
QTY/PKG	1

Fast, long-life universal cutting disc, suitable for concrete and stone

## Diamantjet - diamond cutting disc, premium, tile

Order number 349.038




Technical attributes	
Dimensions in mm	125 Ø x 22,2
QTY/PKG	1

Fast, long-life tile cutting disc with closed diamond segment. Suitable for cutting all tiles, marble, slate, granite and natural stone. Precision cutting and low-noise

## Accessories

### Flap disc for metal and stainless steel, cambered

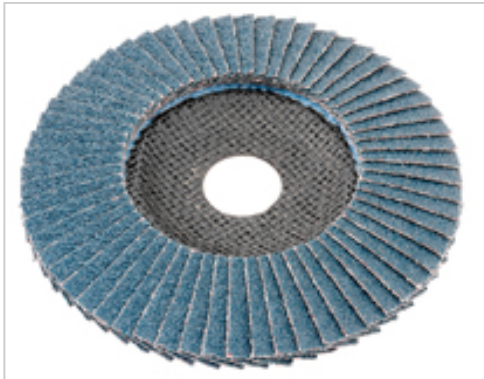

#### Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
125 Ø x 22,2	P 60	10	349.925
125 Ø x 22,2	P 80	10	349.933

Ideal for flap-grinding metals, stainless steel, alloyed and non-alloyed steel, light metals, non ferrous metals, construction steel, to smooth welds and cast iron. Removing welding spots and beads, processing welding seams, breaking and rounding edges. High material removal rate, guarantees effortless working without filling pores.

### SC-VL polishing flap wheel for metal and stainless steel, cambered

Order number 358.606



#### Technical attributes

Dimensions in mm	125 Ø x 22,2
Grit	medium
QTY/PKG	5

Polishing flap wheel for sanding, cleaning and finishing on stainless steel, steel, titanium alloys, light metals, non-ferrous metals and plastics. Remove any tarnish, flash rust, scale and scratches. Preparing, grinding and polishing welds.

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### FixTec quick clamp nut M 14

Order number 313.459



For tool-less disc change, suitable for discs from Ø 115-150 mm.

#### Technical attributes

QTY/PKG	1
---------	---

### Side handgrip

Order number 437.921



Handle for angle grinder, thread M 8.

#### Technical attributes

Type	M 8
QTY/PKG	1

### Brush, steel wire 0,3 mm

Order number 124.516



Corrugated, mount M 14

#### Technical attributes

Dimensions in mm	60 Ø
QTY/PKG	1

## Accessories

### Brush, steel wire 0,5 mm

Order number 124.524



Knot-type, mount M 14

#### Technical attributes

Dimensions in mm	65 Ø
QTY/PKG	1

### Carrying case L-BOXX®

Order number 414.085



#### Technical attributes

External dimensions L x W x H	442 x 357 x 151 mm
Internal dimensions L x W x H	378 x 311 x 107 mm
Weight	2,2 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert, with additional front handle.


FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### Case insert

Order number 414.204

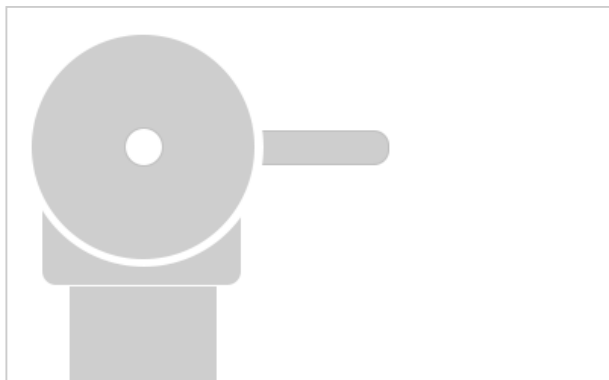

#### Technical attributes

QTY/PKG

1

Suitable insert for carrying case L-BOXX® 136. For all angle grinder in the actual range from 800 up to 1400 watt (except L 3406 VRG).